


DI-COAT SUPERABRASIVE GRINDING MANDRELS FOR USE ON HIGH-SPEED SPINDLES

ELECTROPLATED
For Use with 120,000 rpm
and 175,000 rpm
Grinding Heads

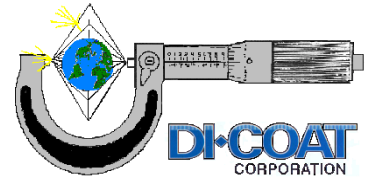

100 GRIT

PART NUMBER		A	B	C	L	PRICE EACH
CBN	Diamond					
C040FX1-100	D040FX1-100	.040	.094	.240	1.00	\$ 11.75
C050FX1-100	D050FX1-100	.050	.125	.312	1.06	\$ 11.75
C060FX1-100	D060FX1-100	.060	.125	.375	1.13	\$ 12.00
C070FX1-100	D070FX1-100	.070	.156	.437	1.19	\$ 12.50
C080FX1-100	D080FX1-100	.079	.156	.500	1.25	\$ 12.50
C090FX1-100	D090FX1-100	.090	.156	.500	1.25	\$ 13.00
C100FX1-100	D100FX1-100	.100	.156	.500	1.25	\$ 13.25
C110FX1-100	D110FX1-100	.110	.188	.500	1.25	\$ 13.75
C118FX1-100	D118FX1-100	.118	.188	.500	1.25	\$ 14.00
C135FX1-100	D135FX1-100	.135	.188	na	1.25	\$ 20.50
C158FX1-100	D158FX1-100	.158	.188	na	1.25	\$ 21.75



220 GRIT

PART NUMBER		A	B	C	L	PRICE EACH
CBN	Diamond					
C018FX1-220	D018FX1-220	.018	.078	.108	.88	\$ 13.30
C024FX1-220	D024FX1-220	.024	.078	.145	.91	\$ 11.75
C030FX1-220	D030FX1-220	.030	.078	.190	.94	\$ 11.75
C035FX1-220	D035FX1-220	.035	.094	.218	.97	\$ 11.75
C040FX1-220	D040FX1-220	.040	.094	.240	1.00	\$ 11.75
C050FX1-220	D050FX1-220	.050	.125	.312	1.06	\$ 11.75
C060FX1-220	D060FX1-220	.060	.125	.375	1.13	\$ 12.00
C070FX1-220	D070FX1-220	.070	.156	.437	1.19	\$ 12.50
C080FX1-220	D080FX1-220	.079	.156	.500	1.25	\$ 12.50
C090FX1-220	D090FX1-220	.090	.156	.500	1.25	\$ 13.00
C100FX1-220	D100FX1-220	.100	.156	.500	1.25	\$ 13.25
C110FX1-220	D110FX1-220	.110	.188	.500	1.25	\$ 13.75
C118FX1-220	D118FX1-220	.118	.188	.500	1.25	\$ 14.00
C135FX1-220	D135FX1-100	.135	.188	na	1.25	\$ 20.50
C158FX1-220	C158FX1-100	.158	.188	na	1.25	\$ 21.75

- Designed for use with high-speed grinding heads.
- Shank diameter held $.1248 \pm .00015$

CAUTION - Follow all safety recommendations provided by the grinding head manufacturer.
- Always check runout each time a wheel is set up prior to energizing spindle.

